



SIPSMT10-05 SERIES

10 AMP POL CONVERTERS



FEATURES

- * Non-isolated POL converter
- * SIP / SMT Package
- * Output Current 10AMP
- * Input Voltage Range 3-5.5VDC
- * 300KHz Switching Frequency
- * High Efficiency to 95%
- * Over Temperature Protection
- * Continuous Short Circuit Protection
- * Remote On/Off Control
- * UL/C-UL60950 Certified



MODEL NUMBER	INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT	INPUT CURRENT		Efficiency (%)
				NO LOAD	FULL LOAD	
SIP10-05S10 SMT10-05S10	3.0 – 5.5 VDC	1.0 VDC	10 A	50 mA	2353 mA	85
SIP10-05S12 SMT10-05S12	3.0 – 5.5 VDC	1.2 VDC	10 A	50 mA	2791 mA	86
SIP10-05S15 SMT10-05S15	3.0 – 5.5 VDC	1.5 VDC	10 A	50 mA	3409 mA	88
SIP10-05S18 SMT10-05S18	3.0 – 5.5 VDC	1.8 VDC	10 A	50 mA	4000 mA	90
SIP10-05S20 SMT10-05S20	3.0 – 5.5 VDC	2.0 VDC	10 A	60 mA	4396 mA	91
SIP10-05S25 SMT10-05S25	3.0 – 5.5 VDC	2.5 VDC	10 A	60 mA	5376 mA	93
SIP10-05S33 SMT10-05S33	4.5 – 5.5 VDC	3.3 VDC	10 A	60 mA	6947 mA	95

NOTE: Nominal Input Voltage 5.0VDC

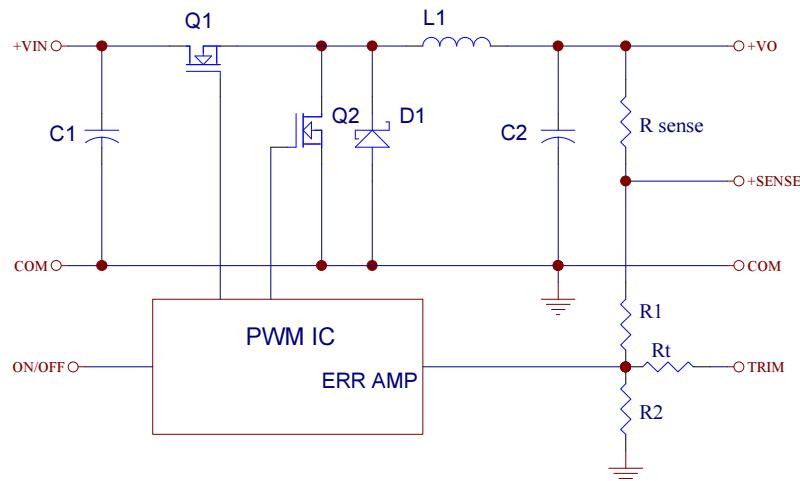


Figure 1. Simplified Schematic

SPECIFICATIONS

All Specifications Typical At Nominal Line, Full Load, and 25°C Unless Otherwise Noted

INPUT SPECIFICATIONS:

Input Voltage Range	5V	3.0 – 5.5V
	5V	4.5 – 5.5V
Under Voltage Lock-out	Power up	2.8V typ.
	Power down	2.7V typ.
Input Filter Type.....		Capacitive
Positive Remote On/Off Control:		
Module on	Open Circuit or = Vin	
Module off	0 to <0.4Vdc	


OUTPUT SPECIFICATIONS:

Voltage Accuracy	±1.5% max.
Transient Response: 25% Step Load Change	<200us
Ripple and Noise, 20MHz BW (note3)	20mVrms max.
	50mVpk-pk max.
Temperature Coefficient	±0.03%/C max.
Short Circuit Protection	Continuous
Line Regulation (note1)	±0.2% max.
Load Regulation (note2)	±0.5% max.
Capacitive Load Low ESR	10000uF max.
External Trim Adj. Range	±10%
Start up time	4.5ms typ.

Dimensions:

SIP Packages

Mechanical Specification
All Dimensions In Inches (mm)
Tolerances Inches: X.XX= ±0.02 , X.XXX= ±0.010
 Millimeters: X.X= ±0.5 , X.XX=±0.25

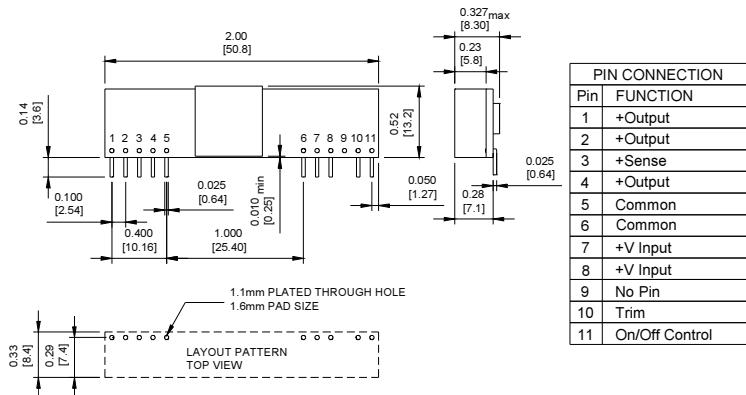

SMT Packages

Bottom View of Board

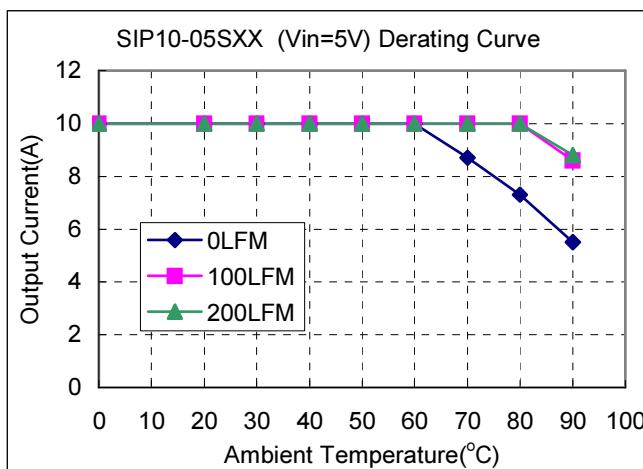
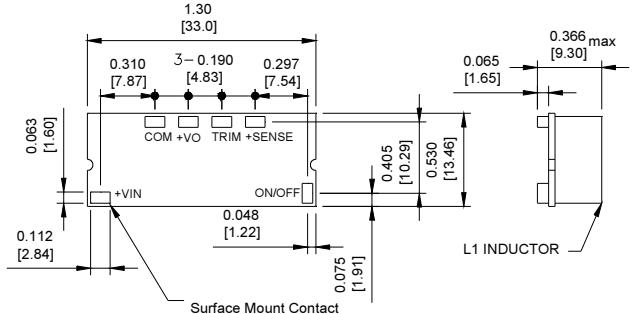


Figure2. Typical Power De-rating for 5V IN

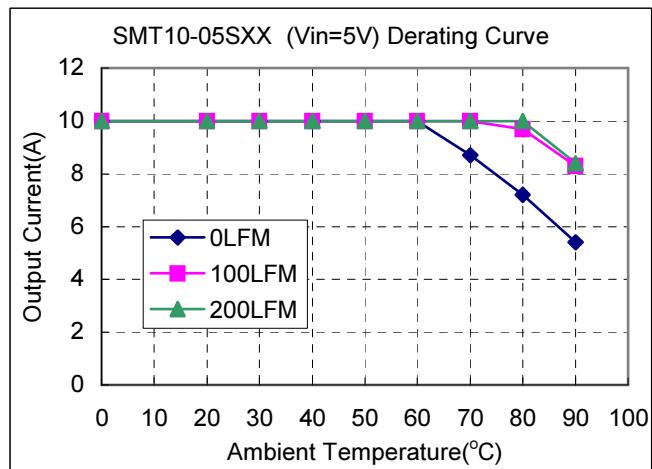


Figure3. Typical Power De-rating for 5V IN