



CFB600W-110S SERIES


600 WATT

DC-DC CONVERTERS

Preliminary

FEATURES

- * 600W Isolated Output
- * Efficiency to 89%
- * Regulated Outputs
- * Remote ON/OFF
- * Over Temperature Protection
- * Over Voltage/Current Protection
- * Continuous Short Circuit Protection
- * Full-Brick Size meet Industry standard
- * CE Mark Meets 2004/108/EC
- * Meet UL60950-1 Basic Insulation
- * Meet EN50155

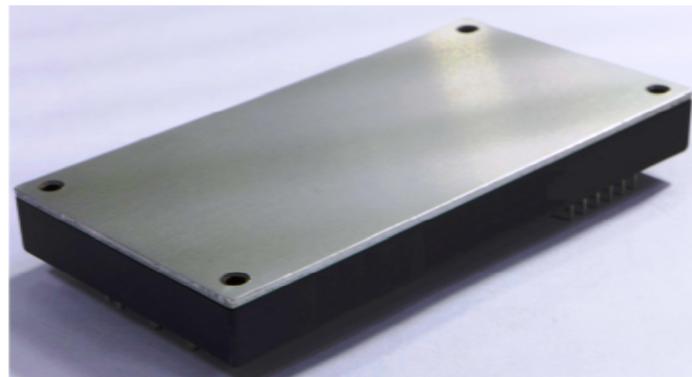

MODEL NUMBER	INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT		INPUT CURRENT		% EFF.	Capacitor Load max.
			MIN.	MAX.	NO LOAD	FULL LOAD		
CFB600W-110S12	43-160 VDC	12 VDC	0mA	50 A	25mA	6.2A	87	10000µF
CFB600W-110S24	43-160 VDC	24 VDC	0mA	25 A	25mA	6.2A	88	5000µF
CFB600W-110S28	43-160 VDC	28 VDC	0mA	21.4 A	25mA	6.2A	88	5000µF
CFB600W-110S48	43-160 VDC	48 VDC	0mA	12.5A	25mA	6.2A	89	5000µF

NOTE:

1. Nominal Input Voltage 110 VDC.
2. The output terminal required a minimum capacitor 470uF to maintain specified regulation.
3. Measure at Nominal Input Voltage.

SPECIFICATIONS

All Specifications Typical At Nominal Line, Full Load, and 25°C Unless Otherwise Noted

INPUT SPECIFICATIONS:

Input Voltage Range	110V	43 - 160V
Input Surge Voltage (100ms max.)		180Vdc max.
Under Voltage Lockout	Power Up	42V
	Power Down	40V
Opto Isolated Remote ON/OFF (Note 8)		
Input Filter		PI Type

OUTPUT SPECIFICATIONS:

Voltage Accuracy	±1.5% max.
Transient Response: 25% Step Load Change	<500u sec.
External Trim Adj. Range	60% - 110%
Ripple & Noise, 20MHz BW(note 3)	
12V	60mV _{RMS} , 120mV _{pk-pk} max.
24V	100mV _{RMS} , 240mV _{pk-pk} max.
28V	100mV _{RMS} , 280mV _{pk-pk} max.
48V	200mV _{RMS} , 480mV _{pk-pk} max.
Temperature Coefficient	±0.03%/°C
Short Circuit Protection	Continuous
Line Regulation (note 1)	±0.2% max.
Load Regulation (note 2)	±0.5% max.
Over Voltage Protection trip Range, % Vo nom.	115-140%
Current Limit	105% - 150% Nominal Output
Auxiliary Output Voltage/Current	10±3Vdc/ 20mA max.
Load Share Accuracy	±10% at 50% to 100% Full Load
Start up time	160ms typ.


GENERAL SPECIFICATIONS:

Efficiency	See Table
Isolation Voltage	Input/Output, Input/Case 2250VDC min.
Output/Case	1500VDC min.
Isolation Resistance	10 ⁷ ohm min.
Isolation Capacitance	4000pF typ.
Switching Frequency	250KHz typ.
Operating Case Temperature	-40°C to 100°C
Storage Temperature	-55°C to +105°C
Thermal Shutdown, Case Temp.	110°C typ.
Humidity	95% RH max. Non condensing
Operating Altitude	4000m
MTBF	MIL-HDBK-217F, GB, 25°C, Full Load TBD.
Safety	UL60950-1 2 nd (Basic insulation)
EMC(note 6)	meet EN50155(EN50121-3-2) with external filter
Shock/Vibration	meet EN50155(EN61373)
Environmental	meet EN50155(EN60068-2-1)
Dimensions	4.60×2.40 x0.50 inches (116.8x61.0x12.7 mm)
Case Material	Aluminum Baseplate with Plastic Case
Weight	220 g

NOTE:

1. Measured From High Line to Low Line
2. Measured From Full Load to Zero Load
3. Output Ripple and Noise measured with 1uF ceramic capacitor across output
4. An external input capacitor 220uF for all models are recommended to reduce input ripple voltage.
5. Design to meet EN50155 and RIA12 refer to Application Note
6. Trim-up: Connect a Resistor between Trim Pin and +Sense.
Trim-down: Connect a Resistor between Trim Pin and -Sense.
7. Suffix "-C0" to the model number with threaded mounting holes (M3x0.5)
8. Standard model is negative logic , suffix "P" to the model number with positive logic. (refer application note)

All Dimensions In mm(Inches)
Tolerances mm: .X±0.25 .XX±0.1 ±0.25
Inches: .XX±0.01 .XXX±0.004 ±0.01

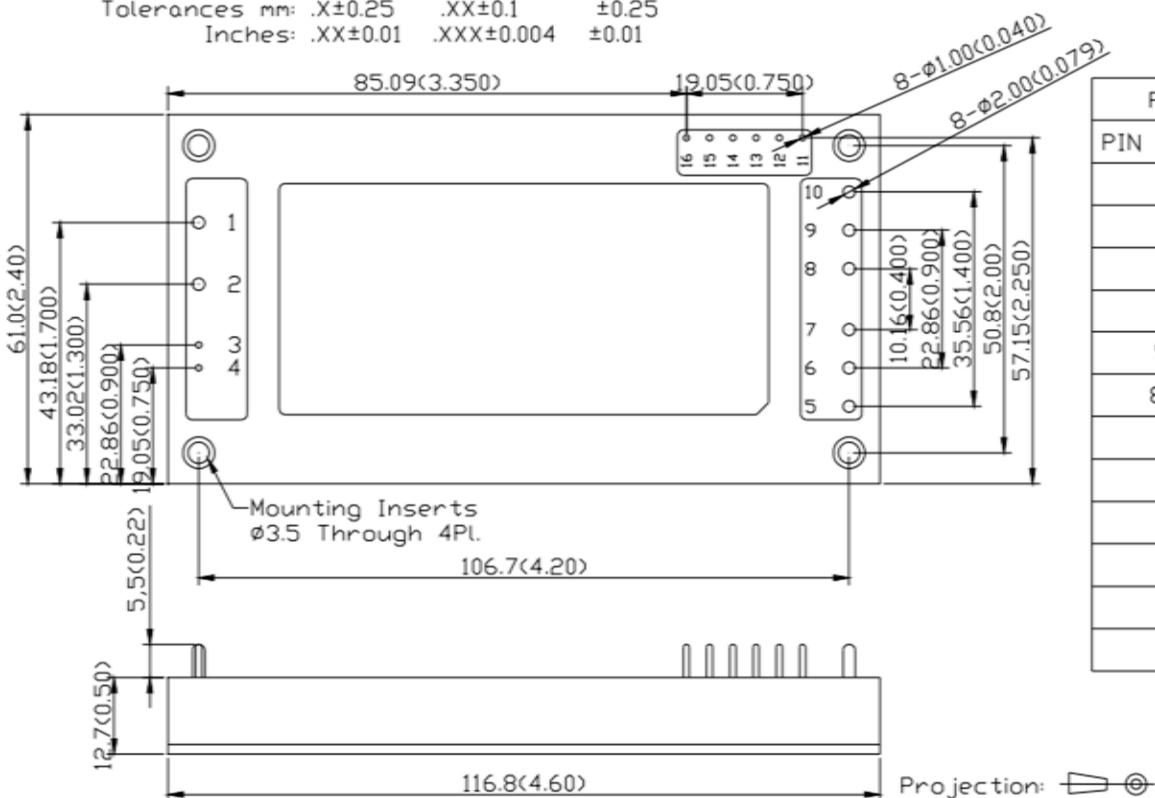

PIN	CONNECTIONS
PIN NUMBER	FUNCTION
1	-Vin
2	+Vin
3	-ON/OFF
4	+ON/OFF
5~7	+Vo
8~10	-Vo
11	-S
12	+S
13	TRIM
14	PC
15	I _O G
16	AUX